



# IP67 waterproof grade

Ultra thin design | All aluminum housing | Full power.

# WATERPOOF POWERSUPPLY



Three year  
warranty



Stable and durable



Brand assurance




Good heat dissipation




Intelligent circuit

# Product attributes

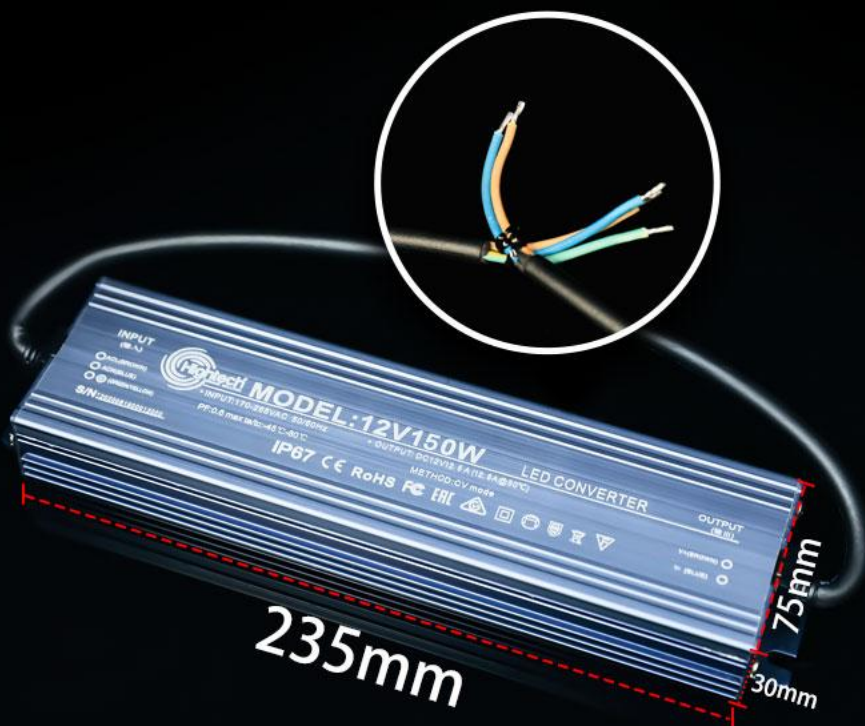

|                                   |                                  |
|-----------------------------------|----------------------------------|
| Power name: WATERPOOF POWERSUPPLY | Power size: 235*75*30mm          |
| Power model: HT-WH-150-12         | Waterproof grade: IP67           |
| Input: 170-265VAC 50/60Hz         | Warranty period: 3-year warranty |
| Output: DC12V 12.5A (12.5A@50°C)  |                                  |

# Detail display

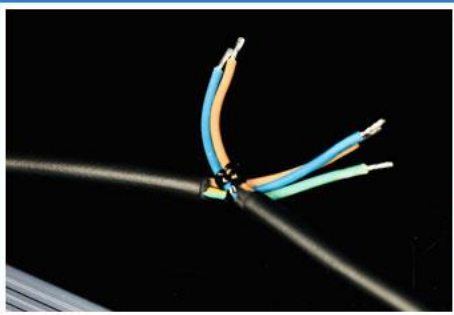


Pure copper core power cord

Low heat loss, safe and reliable  
the copper wire has small heating,  
which is safe and reliable

All aluminum shell

Good heat conduction effect,  
rust prevention and corrosion  
prevention



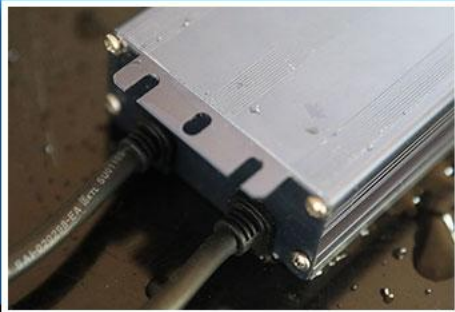

All aluminum shell

Simple installation and  
convenient fixation

Ultra thin body

Concealed installation,  
easy installation



# Scope of application



Electronic instruments,  
equipment and devices



industrial control system



Mechanical and  
electrical equipment



Industrial  
automation machinery



LED lighting



Advertising light box

## wi



## Ph



Input:

170-265VAC 50/60Hz

Output:

DC12V3.75A(3.75A@50°C)

Rated power

45W

Waterproof grade

IP67

Product size

180\*65\*25mm

PF:

0.6max



**Input:**

170-265VAC 50/60Hz

**Output:**

DC12V 5A (5A@50°C)

**Rated power**

60W

**Waterproof grade**

IP67

**Product size**

180\*65\*25mm

**PF:**

0.6max



**Input:**

170-265VAC 50/60Hz

**Output:**

DC12V 8.3A (8.3A@50°C)

**Rated power**

100W

**Waterproof grade**

IP67

**Product size**

235\*75\*30mm

**PF:**

0.6max



**Input:**

170-265VAC 50/60Hz

**Output:**

DC12V 16.6A (16.6A@50°C)

**Rated power**

200W

**Waterproof grade**


IP67

**Product size**

245\*90\*40mm

**PF:**

0.6max

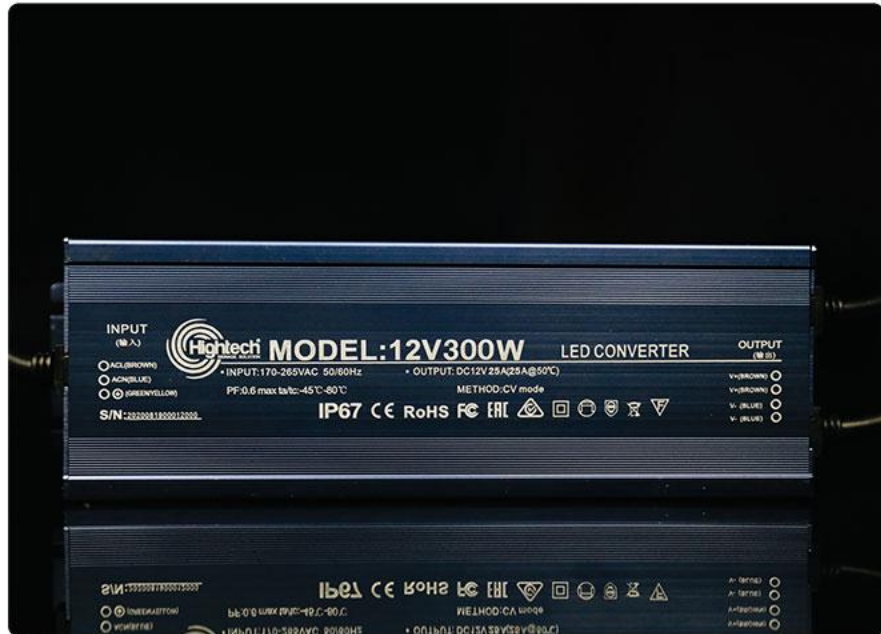

**Input:**

170-265VAC 50/60Hz

**Output:**

DC 12V 25A(25A@50°C)

**Rated power**

300W

**Waterproof grade**

IP67

**Product size**

290\*90\*40mm

**PF:**

0.6max



**Input:**

170-265VAC 50/60Hz

**Output:**

DC12V 33A(33A@50°C)

**Rated power**

400W

**Waterproof grade**

IP67

**Product size**

290\*90\*40mm

**PF:**

0.6max